

Introduction

The Xilinx LogiCORE™ IP v5.0 core implements a generalized coordinate rotational digital computer (CORDIC) algorithm.

Features

- AXI4-Stream-compliant Interfaces
- Functional configurations
 - Vector rotation (polar to rectangular)
 - Vector translation (rectangular to polar)
 - Sin and Cos
 - Sinh and Cosh
 - Atan and Atanh
 - Square root
- Optional coarse rotation module to extend the range of CORDIC from the first quadrant ($+\pi/4$ to $-\pi/4$ Radians) to the full circle
- Optional amplitude compensation scaling module to compensate for the output amplitude scale factor of the CORDIC algorithm
- Output rounding modes: Truncation, Round to Pos Infinity, Round to Pos/Neg Infinity, and Round to Nearest Even
- Word serial architectural configuration for small area
- Parallel architectural configuration for high throughput
- Control of the internal add-sub precision
- Control of the number of add-sub iterations
- X and Y data formats: Signed Fraction, Unsigned Fraction, and Unsigned Integer
- Phase data formats: Radian, Pi Radian
- Fully synchronous design using a single clock
- For use with Xilinx CORE Generator™ and Xilinx System Generator for DSP, v13.3.

LogiCORE IP Facts Table	
Core Specifics	
Supported Device Family ⁽¹⁾	Virtex-7 and Kintex-7, Artix™-7, Zynq™-7000, Virtex-6, Spartan-6
Supported User Interfaces	AXI4-Stream
Provided with Core	
Documentation	Product Specification
Design Files	Netlist
Example Design	Not Provided
Test Bench	VHDL
Constraints File	N/A
Simulation Model	Verilog and VHDL
Tested Design Tools	
Design Entry Tools	CORE Generator tool 13.3 System Generator for DSP 13.3
Simulation ⁽²⁾	Mentor Graphics ModelSim Cadence Incisive Enterprise Simulator (IES) Synopsys VCS and VCS MX ISim
Synthesis Tools	N/A
Support	
Provided by Xilinx, Inc.	

1. For a complete listing of supported devices, see the [release notes](#) for this core.
2. For the supported version of the tools, see the [ISE Design Suite 13: Release Notes Guide](#)

General Description

The CORDIC core implements a generalized coordinate rotational digital computer (CORDIC) algorithm, initially developed by Volder[1] to iteratively solve trigonometric equations, and later generalized by Walther[2] to solve a broader range of equations, including the hyperbolic and square root equations. The CORDIC core implements the following equation types:

- Rectangular <-> Polar Conversion
- Trigonometric
- Hyperbolic
- Square Root

Two architectural configurations are available for the CORDIC core:

- A fully parallel configuration with single-cycle data throughput at the expense of silicon area
- A word serial implementation with multiple-cycle throughput but occupying a small silicon area

A coarse rotation is performed to rotate the input sample from the full circle into the first quadrant. (The coarse rotation stage is required as the CORDIC algorithm is only valid over the first quadrant). An inverse coarse rotation stage rotates the output sample into the correct quadrant.

The CORDIC algorithm introduces a scale factor to the amplitude of the result, and the CORDIC core provides the option of automatically compensating for the CORDIC scale factor.

The CORDIC algorithm can be used to solve several functions as described above. These functions take different combinations of cartesian and polar operands. The operands X_IN and Y_IN are input using the S_AXIS_CARTESIAN channel and the PHASE_IN operand is input using the S_AXIS_PHASE input.

A block diagram of the CORDIC core is presented in Figure 1.

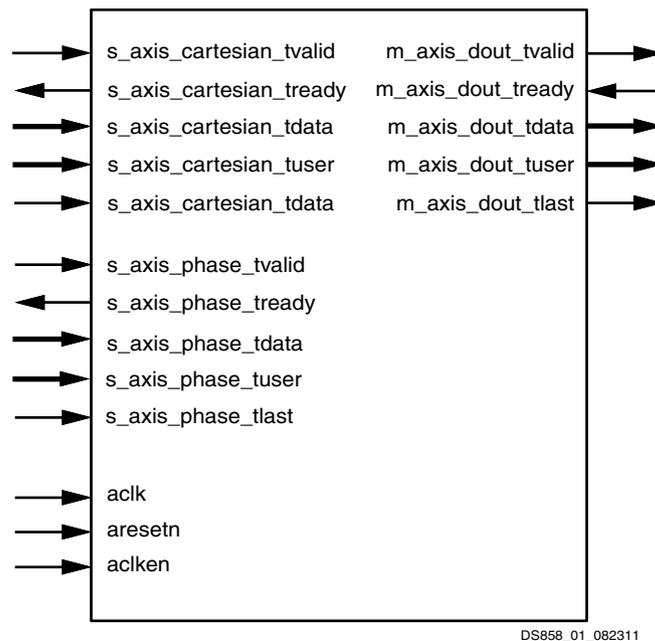


Figure 1: CORDIC Symbol and Pinout

Interface Pins

Table 1: Core Pinout

Port Name	Direction	Description
ack	IN	Clock. Active rising edge.
aclken	IN	Clock Enable. Active high
aresetn	IN	Synchronous Reset. Active low. aresetn must be active for at least 2 clock cycles when asserted.
s_axis_cartesian_tvalid	IN	Handshake signal for channel S_AXIS_CARTESIAN. See AXI4-Stream Considerations .
s_axis_cartesian_tready	OUT	Handshake signal for channel S_AXIS_CARTESIAN. See AXI4-Stream Considerations .
s_axis_cartesian_tdata[A-1:0]	IN	Depending on Functional Configuration, this port will have one or two subfields; X_IN and Y_IN. These are the cartesian operands. Each subfield is Input_Width bits wide, padded to the next byte width before being concatenated. See TDATA Packing .
s_axis_cartesian_tuser[B-1:0]	IN	Data on this port will be delayed with the same latency as TDATA and appear on m_axis_dout_tuser. See AXI4-Stream Considerations .
s_axis_cartesian_tlast	IN	TLAST is not used by the core, but will be combined with s_axis_phase_tlast, or passed untouched to m_axis_dout_tlast according to TLAST_Behavior && Check GUI field name.
s_axis_phase_tvalid	IN	Handshake signal for channel S_AXIS_PHASE. See AXI4-Stream Considerations .
s_axis_phase_tready	OUT	Handshake signal for channel S_AXIS_PHASE. See AXI4-Stream Considerations .
s_axis_phase_tdata[C-1:0]	IN	This port has one subfield, PHASE_IN. It is the polar operand. The subfield is Input_Width bits wide, padded to the next byte width.
s_axis_phase_tuser[D-1:0]	IN	Data on this port will be delayed with the same latency as TDATA and appear on m_axis_dout_tuser. See AXI4-Stream Considerations .
s_axis_phase_tlast	IN	TLAST is not used by the core, but will be combined with s_axis_cartesian_tlast, or passed untouched to m_axis_dout_tlast according to TLAST_Behavior && Check GUI field name.
m_axis_dout_tvalid	OUT	Handshake signal for channel M_AXIS_DOUT. See AXI4-Stream Considerations .
m_axis_dout_tready	IN	Handshake signal for channel M_AXIS_DOUT. See AXI4-Stream Considerations .
m_axis_dout_tdata[E-1:0]	OUT	Depending on Functional Configuration this port will contain the following subfields; X_OUT, Y_OUT, PHASE_OUT. Each subfield will be Output_Width bits wide, padded to the next byte width before concatenation.
m_axis_dout_tuser[F-1:0]	OUT	This port will contain the values input to s_axis_cartesian_tuser and/or s_axis_phase_tuser delayed by the same latency as for TDATA.
m_axis_dout_tlast	OUT	This port will output s_axis_cartesian_tlast, s_axis_phase_tlast or some combination of the two delayed by the same latency as for TDATA.

Note: All AXI4-Stream port names are lower case; however, for readability, upper case is used in this document when referring to port name suffixes, such as TDATA or TLAST.

Width constants A thru F are arbitrary values, determined by GUI or XCO parameters. Many pins are optional. Input channels are absent if the function selected does not require the operands carried by the channel in question. For example, the Square Root function does not require PHASE_IN, so S_AXIS_PHASE is not present for this function.

Data Inputs and Outputs

The set of data input ports and output TDATA subfields for a particular Functional Configuration are automatically determined by the GUI, shown in [Table 2](#).

Table 2: Input/Output Subfields vs. Functional Configuration

Function	S_AXIS_CARTESIAN		S_AXIS_PHASE	M_AXIS_DOUT		
	XIN	YIN	PHASE_IN	XOUT	YOUT	PHASE_OUT
Rotate	1	1	1	1	1	0
Translate	1	1	0	1	0	1
Sin and Cos	0	0	1	1	1	0
ArcTan	1	1	0	0	0	1
Sinh and Cosh	0	0	1	1	1	0
ArcTanh	1	1	0	0	0	1
Square Root	1	0	0	1	0	0

Notes:

1. A '1' indicates that the subfield (and parent channel) are present. A '0' indicates that the subfield is absent. If all subfields of a channel are absent, the channel is also absent. The X_IN operand, if present, is in the least significant bit positions of S_AXIS_CARTESIAN. Similarly, X_OUT is in the least significant position of M_AXIS_DOUT, with Y_OUT in the next significant position and PHASE_OUT in the most significant position. Where one or more is missing, the remaining operands shift down in bit position. For example, for Translate with output_width of 8, XOUT is [7:0] and PHASE_OUT is [15:8] of M_AXIS_DOUT_TDATA.

CORE Generator GUI and Parameters

The CORDIC Graphical User Interface (GUI) contains three pages for configuring the core and two information tabs.

Tab 1 & 2: IP Symbol and Implementation Details

The IP Symbol tab illustrates the core pinout.

The Implementation Details tab displays the core latency and resource usage. The block RAM and Multiplier/XtremeDSP Slice resources are only utilized when Compensation Scaling is selected.

Page 1

Used to configure the functional selection and architecture of the CORDIC core.

- **Component Name:** Used as the base name of the output files generated for the core. Names must begin with a letter and be composed from the following characters: a to z, 0 to 9, and “_.”
- **Functional Selection:** The functional selections available are Rotate, Sin and Cos, ArcTan, Square Root, Translate, Sinh and Cosh and ArcTanh. See the [Functional Description](#) section for more information on each of the supported functions. In general, X_IN, Y_IN, X_OUT and Y_OUT express signed binary numbers of 1QN format and PHASE_IN and PHASE_OUT express signed binary numbers of 2QN format. When Square Root is selected, two new data formats are available: Unsigned Integer and Unsigned Fraction. For details about CORDIC binary data formats, see [Input/Output Data Representation](#).
- **Architectural Configuration:** Two architectural configurations are available for the CORDIC core, Parallel and Word Serial. See [Architectural Configuration](#) for more details.
- **Pipelining Mode:** The CORDIC core provides three pipelining modes: None, Optimal, and Maximum. The choice of pipelining mode is based on the selection of Functional Configuration and Architectural Configuration. Unavailable pipelining modes are greyed out in the GUI.

- **None:** the CORDIC core is implemented without pipelining.
- **Optimal:** the CORDIC core is implemented with as many stages of pipelining as possible without using any additional LUTs.
- **Maximum:** the CORDIC core is implemented with a pipeline after every shift-add sub stage.
- **Data Format:** The CORDIC core provides three formats for expressing the X and Y components of data samples:
 - **Signed Fraction:** Default setting. The X and Y inputs and outputs are expressed as fixed-point 2's complement numbers with an integer width of 2 bits. Example: "11100000" represents the value -0.5.
 - **Unsigned Fraction:** The X and Y inputs and outputs are expressed as unsigned fixed-point number with an integer width of 1 bit. Available only for Square Root functional configuration. Example: "11100000" represents the value +1.75.
 - **Unsigned Integer:** The X and Y inputs and outputs express unsigned integers. Available only for Square Root functional configuration. Example: "11100000" represents the value +224.
- **Phase Format:** The CORDIC core provides two Phase Format options:
 - **Radians:** The phase is expressed as a fixed-point 2's complement numbers with an integer width of 3 bits, in radian units. Example: "01100000" represents the value 3.0 radians.
 - **Scaled Radians:** The phase is expressed as fixed-point 2's complement numbers with an integer width of 3 bits, with Pi-radian units. One scaled-radian equals $\text{Pi} * 1$ radians. Example: "11110000" represents the value $-0.5 * \text{Pi}$ radians.

See [Input/Output Data Representation](#) for more information about CORDIC binary data formats.

- **Input / Output Options:** The CORDIC core provides four input / output common configuration options.
 - **Input Width:** Input Width controls the widths of the input ports, X_IN, Y_IN and PHASE_IN. The Input Width can be configured in the range 8 to 48 bits.
 - **Register Inputs:** Selects if the input signals X_IN, Y_IN, PHASE_IN are registered.
 - **Output Width:** Output Width controls the widths of the output ports, X_OUT, Y_OUT, PHASE_OUT. The Output Width can be configured in the range 8 to 48 bits.
 - **Register Outputs:** Selects if the output signals, X_OUT, Y_OUT, PHASE_OUT are registered.
- **Round Mode:** The CORDIC core provides four rounding modes. [Table 3](#) illustrates the behavior of the different Rounding modes.
 - **Truncate:** The X_OUT, Y_OUT, and PHASE_OUT outputs are truncated.
 - **Positive Infinity:** The X_OUT, Y_OUT, and PHASE_OUT outputs are rounded such that 1/2 is rounded up (towards positive infinity). It is equivalent to the MATLAB function `floor(x+0.5)`.
 - **Pos Neg Infinity:** The outputs X_OUT, Y_OUT, and PHASE_OUT are rounded such that 1/2 is rounded up (towards positive infinity) and -1/2 is rounded down (towards negative infinity). It is equivalent to the MATLAB function `round(x)`.
 - **Nearest Even:** The X_OUT, Y_OUT, and PHASE_OUT outputs are rounded toward the nearest even number such that a 1/2 is rounded down and 3/2 is rounded up.

Table 3: Rounding Modes

	Truncate	Pos Neg Infinity	Positive Infinity	Nearest Even
1.50	1	2	2	2
1.00	1	1	1	1
0.50	0	1	1	0

Table 3: Rounding Modes (Cont'd)

	Truncate	Pos Neg Infinity	Positive Infinity	Nearest Even
0.25	0	0	0	0
0.00	0	0	0	0
- 0.25	-1	0	0	0
- 0.50	-1	-1	0	-1
- 0.75	-1	-1	-1	-1

- **Advanced Configuration Parameters**

- **Iterations:** Controls the number of internal add-sub iterations to perform. When Iterations is set to zero, the number of iterations performed is determined by the required accuracy of the output. By default, Iterations is set to zero, thus the number of iterations is automatically determined.
- **Precision:** Configures the internal precision of the add-sub iterations. When Precision is set to zero, internal precision is determined automatically based on the required accuracy of the output and the number of internal iterations. By default, Precision is set to zero, thus the internal precision is automatically determined. When Precision is set to (input width + output width + $\log_2(\text{output_width})$) the output phase is precise to the full output width regardless of input magnitude. However, the output phase accuracy is still limited by the OQEQ component of [Output Quantization Error](#) and by the number of Iterations of the CORDIC Micro-Rotation block.
- **Coarse Rotation:** Controls the instantiation of the coarse rotation module. Instantiation of the coarse rotation module is the default for the functional configurations: Vector rotation, Vector translation, Sin and Cos, and ArcTan. If Coarse Rotation is turned off for these functions, the input/output range is limited to the first quadrant ($-\pi/4$ to $+\pi/4$). Coarse rotation is not required for the Sinh and Cosh, ArcTanh, and Square Root configurations. The standard CORDIC algorithm operates over the first quadrant. Coarse Rotation extends the CORDIC operational range to the full circle by rotating the input sample into the first quadrant and inverse rotating the output sample back into the appropriate quadrant.
- **Compensation Scaling:** Controls the compensation scaling module used to compensate for CORDIC magnitude scaling. CORDIC magnitude scaling affects the Vector Rotation and Vector Translation functional configurations. It does *not* affect the Sin, Cos, Sinh, Cosh, ArcTan, ArcTanh and Square Root functional configurations. For the latter configurations, compensation scaling is set to No Scale Compensation. CORDIC magnitude scaling is a side effect of the CORDIC algorithm. The magnitude outputs, X and Y, are generated scaled by the CORDIC scale factor, Z_n . The compensation scaling module compensates for the effect of CORDIC magnitude scaling by scaling the outputs, X and Y, by $1/Z_n$.
 - **No Scale Compensation:** The outputs X and Y are not compensated and are generated, scaled by the ratio Z_n .
 - **LUT Based:** The outputs X and Y are compensated using a LUT-based Constant Coefficient Multiplier.
 - **BRAM:** The outputs X and Y are compensated using a block RAM-based Constant Coefficient Multiplier.
 - **Embedded Multiplier:** The outputs X and Y are compensated using the XtremeDSP™ Slice or embedded multiplier depending on the family of part chosen in the CORE Generator project options.

Page 2

Used to configure the AXI4 Stream interfaces.

AXI4 Stream Options

Cartesian Channel Options:

- **Has TLAST:** Selects optional port `s_axis_cartesian_tlast`
- **HAS TUSER:** Selects optional port `s_axis_cartesian_tuser`
- **TUSER Width:** Determines width of `s_axis_cartesian_tuser`

Phase Channel Options:

- **Has TLAST:** Selects optional port `s_axis_phase_tlast`
- **HAS TUSER:** Selects optional port `s_axis_phase_tuser`
- **TUSER Width:** Determines width of `s_axis_phase_tuser`
- **Flow Control:** Selects Blocking or NonBlocking behavior of AXI4 Stream channels for the whole core.
- **Optimize Goal:** Selects between performance and resources as the goal of optimization. Specifically in AXI4-Stream implementation, selecting Performance can lead to a larger output buffer, but performance similar to XtremeDSP slices. Selecting Resources will limit the size of the output buffer, but may result in lower maximum achievable clock frequency.
- **Output has TREADY:** Selects optional port `m_axis_dout_tready`. With this option, the core may be stalled by backpressure and so needs an output buffer (internally). Without this option, the core may not be stalled and will not require an output buffer so will lead to a smaller design.
- **Output TLAST Behavior:** Selects the logic combination of input TLASTs to become `m_axis_dout_tlast`. When neither input TLAST is selected this will be forced to Null and `m_axis_dout_tlast` will not be present. When only one is selected, `m_axis_dout_tlast` will exist and will output the delayed input TLAST. When both input TLASTs are selected, the output, suitably delayed may be selected as either input, or a logical OR of the inputs, or a logical AND of the inputs.

Optional Pins

- **ACLKEN:** Selects optional port `aclken`. This is provided primarily for ease of migration. It is not recommended when designing with AXI4 Stream Blocking modes.
- **ARESETN:** Selects optional port `aresetn`. Note that `aresetn` is active low and must be asserted for a minimum of 2 `ack` cycles to reset the core.

System Generator GUI and Parameters

This section details the parameters that differ from the CORE Generator GUI. See [CORE Generator GUI and Parameters](#) for more information about all other parameters. The CORDIC core can be found in the Xilinx Blockset in the Math section. The block is called "CORDIC v5.0". See the System Generator for DSP Help page for the "CORDIC v5.0" block for more information on parameters not mentioned here. The System Generator for DSP GUI offers the same parameters as the CORE Generator GUI.

Implementation

See the System Generator documentation for information about the FPGA Area Estimation parameter.

XCO Parameters

Table 4 defines the mapping between GUI parameters and XCO parameters.

Table 4: XCO Parameters

GUI Parameter	Default Value	XCO Values	XCO Parameter
Component Name	cordic_v5_0		Component_Name
Functional Selection	Rotate	Rotate, Translate, Sin_and_Cos, Sinh_and_Cosh, Arc_Tan, Arc_Tanh, Square_Root	Functional_Selection
Architectural Configuration	Parallel	Word_Serial, Parallel	Architectural_Configuration
Pipelining Mode	Maximum	No_Pipelining, Optimal, Maximum	Pipelining_Mode
Data Format	SignedFraction	SignedFraction, UnsignedFraction, UnsignedInteger	Data_Format
Phase Format	Radians	Radians, Scaled_Radians	Phase_Format
Input Width	16	8 to 48	Input_Format
Output Width	16	8 to 48	Output_Format
Round Mode	Truncate	Truncate, Round_Pos_Inf, Round_Pos_Neg_Inf, Nearest_Even	Round_Mode
Iterations	0	0 to 48	Iterations
Precision	0	0 to 48	Precision
Coarse Rotation	false	false, true	Coarse_Rotation
Compensation Scaling	No_Scale_Compensation	No_Scale_Compensation, LUT_based, BRAM, Embedded_Multiplier	Compensation_Scaling
Cartesian Has TLAST	false	false, true	cartesian_has_tlast
Cartesian Has TUSER	false	false, true	cartesian_has_tuser
Cartesian TUSER Width	1	1 to 64	cartesian_tuser_width
Phase Has TLAST	false	false, true	phase_has_tlast
Phase Has TUSER	false	false, true	phase_has_tuser
Phase TUSER Width	1	1 to 64	phase_tuser_width
Flow Control	NonBlocking	NonBlocking, Blocking	flow_control
Optimize Goal	Resources	Resources, Performance	optimize_goal
Output has TREADY	false	false, true	out_tready
OutputTLAST Behavior	Null	Null, Pass_Cartesian_TLAST, Pass_Phase_TLAST, OR_all_TLASTs, AND_all_TLASTs	out_tlast_behv
ACLKEN	false	false, true	ACLKEN
ARESETN	false	false, true	ARESETN

Demonstration Test Bench

When the core is generated using the Xilinx CORE Generator tool, a demonstration test bench is created. This is a simple VHDL test bench that exercise the core.

The demonstration test bench source code is one VHDL file: `demo_tb/tb_<component_name>.vhd` in the CORE Generator output directory. The source code is comprehensively commented.

Using the Demonstration Test Bench

The demonstration test bench instantiates the generated CORDIC core. Either the behavioral model or the netlist can be simulated within the demonstration test bench.

- **Behavioral model:** Ensure that the CORE Generator project options are set to generate a behavioral model.

After generation, this creates a behavioral model wrapper named `<component_name>.vhd`. Compile this file into the work library (see your simulator documentation for information on how to do this).

- **Netlist:** If the CORE Generator project options were set to generate a structural model, a VHDL or Verilog netlist named `<component_name>.vhd` or `<component_name>.v` was generated. If this option was not set, generate a netlist using the netgen program, for example:

```
netgen -sim -ofmt vhdl <component_name>.ngc <component_name>_netlist.vhd
```

Compile the netlist into the work library (see your simulator documentation for more information).

Compile the demonstration test bench into the work library. Then simulate the demonstration test bench. View the test bench signals in the simulator waveform viewer to see the operations of the test bench.

Demonstration Test Bench in Detail

The demonstration test bench performs the following tasks:

- Instantiates the core
- Generates stimulus data sets for each input channel. Both sets are rotating phasors
- Generates a clock signal
- Drives the clock enable and reset input signals of the core (if present)
- Drives the input signals of the core to demonstrate core features
- Checks that the core output signals obey AXI protocol rules (data values are not checked in order to keep the test bench simple)
- Provides signals showing the separate fields of AXI TDATA and TUSER signals

The demonstration test bench drives the input signals of the core to demonstrate the features and modes of operation of the core. The CORDIC core is driven with two simple data sets (phasors of different periods) to stimulate the core with a wide range of positive and negative values, including zero. The input data is pre-generated and stored in data tables, and the test bench drives the core data inputs with the ramp data throughout the operation of the test bench.

The demonstration test bench drives the AXI handshaking signals in different ways, split into three phases. The operations depend on whether Blocking Mode or NonBlocking Mode is selected:

- **Blocking Mode:**
 - Phase 1: full throughput, all TVALID and TREADY signals are tied high
 - Phase 2: apply increasing amounts of back pressure by de-asserting the master channel's TREADY signal
 - Phase 3: deprive slave dividend channel of valid transactions at an increasing rate by de-asserting its TVALID signal
- **NonBlocking Mode:**
 - Phase 1: full throughput, all TVALID and TREADY signals are tied high
 - Phase 2: deprive slave dividend channel of valid transactions at an increasing rate by de-asserting its TVALID signal
 - Phase 3: deprive all slave channels of valid transactions at different rates by de-asserting each of their TVALID signals

Customizing the Demonstration Test Bench

It is possible to modify the demonstration test bench to drive the inputs of the core with different data or to perform different operations. Input data is pre-generated in the `create_ip_cartesian_table` and `create_ip_phase_table` functions and stored in the `IP_cartesian_DATA` and `IP_phase_DATA` constants. New input data frames can be added by defining new functions and constants. Make sure that each input data frame is of an appropriate type, similar to the `T_IP_cartesian_TABLE` and `T_IP_phase_TABLE` array types.

All operations performed by the demonstration test bench to drive the inputs of the core are done in the stimuli process. This process is comprehensively commented, to explain clearly what is being done. New input data or different ways of driving AXI handshaking signals can be added by modifying sections of this process. The total run time of the test can be modified by changing the `TEST_CYCLES` constant: this controls the number of clock cycles before the simulation is stopped. The clock frequency of the core can be modified by changing the `CLOCK_PERIOD` constant.

AXI4-Stream Considerations

The conversion to AXI4-Stream interfaces brings standardization and enhances interoperability of Xilinx IP LogiCORE solutions. Other than general control signals such as `aclk`, `aclken` and `aresetn`, all inputs and outputs to the CORDIC core are conveyed using AXI4-Stream channels. A channel consists of `TVALID` and `TDATA` always, plus several optional ports and fields. In the CORDIC core, the optional ports supported are `TREADY`, `TLAST` and `TUSER`. Together, `TVALID` and `TREADY` perform a handshake to transfer a message, where the payload is `TDATA`, `TUSER` and `TLAST`. The CORDIC core operates on the operands contained in the `TDATA` fields and outputs the result in the `TDATA` field of the output channel. The CORDIC core does not use inputs, `TUSER` and `TLAST` as such, but the core provides the facility to convey these fields with the same latency as for `TDATA`. This facility of passing `TLAST` and `TUSER` from input to output is intended to ease use of the CORDIC core in a system. For example, the CORDIC core might operate on streaming packetized data. In this example, the core could be configured to pass the `TLAST` of the packetized data channel, thus saving the system designer the effort of constructing a bypass path for this information. For more information about AXI4-Stream Interfaces see [\[Ref 3\]](#) and [\[Ref 4\]](#).

Basic Handshake

[Figure 2](#) shows the transfer of data in an AXI4-Stream channel. `TVALID` is driven by the source (master) side of the channel and `TREADY` is driven by the receiver (slave). `TVALID` indicates that the value in the payload fields (`TDATA`, `TUSER` and `TLAST`) is valid. `TREADY` indicates that the slave is ready to receive data. When both `TVALID` and `TREADY` are true in a cycle, a transfer occurs. The master and slave set `TVALID` and `TREADY` respectively for the next transfer appropriately.

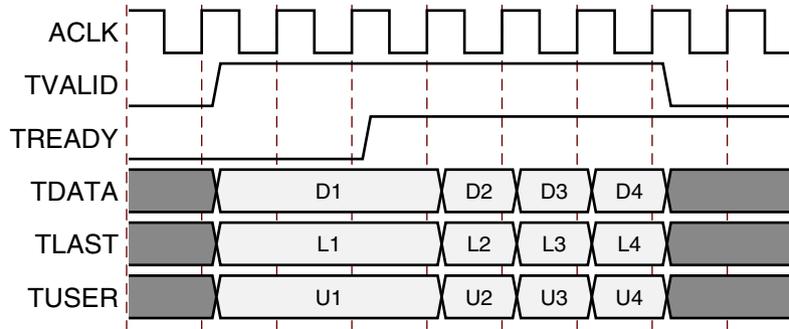


Figure 2: Data Transfer in an AXI-Stream Channel

Non Blocking Mode

The CORDIC core provides a mode intended to ease the migration from previous, non-AXI versions of this core. The term 'NonBlocking' is used to indicate that lack of data on one input channel does not cause incoming data on the other channel to be buffered. Also, back pressure from the output is not possible because in NonBlocking mode the output channel does not have a TREADY signal. The full flow control of AXI4-Stream is not always required. Blocking or NonBlocking behavior is selected using the flow_control XCO parameter or GUI field. The choice of Blocking or NonBlocking applies to the whole core, not each channel individually. Channels still have the non-optional TVALID signal, which is analogous to the New Data (ND) signal on many cores prior to the adoption of AXI4-Stream. Without the facility to block dataflow, the internal implementation is much simplified, so fewer resources are required for this mode. This mode is recommended for users migrating their design to this version from a pre-AXI version with minimal change.

When all of the present input channels receive an active TVALID (and TREADY, if present, is asserted), an operation is validated and the output TVALID (suitably delayed by the latency of the core) is asserted to qualify the result. This is to allow a minimal migration from previous versions. In the event that one channel receives TVALID and the other does not, an operation does not occur, even if TREADY is present and asserted. Unlike Blocking mode (which is fully AXI4-Stream compliant) valid transactions on an individual channel can be ignored in NonBlocking mode. For performance, aresetn is registered internally, which delays its action by one clock cycle. The effect is that the core is still reset and does not accept input in the cycle following the de-assertion of ARESETN. TVALID is also inactive on the output channel for this cycle.

Figure 3 shows the NonBlocking mode in operation. For simplicity of illustration, the latency of the core is zero. As indicated by s_axis_cartesian_tready and s_axis_phase_tready (which are ultimately the same signal), the core can accept data on every third cycle. Data A1 in the cartesian channel is ignored because s_axis_phase_tvalid is de-asserted. Data inputs A2 and B1 are accepted because both TVALIDs and TREADY are asserted.

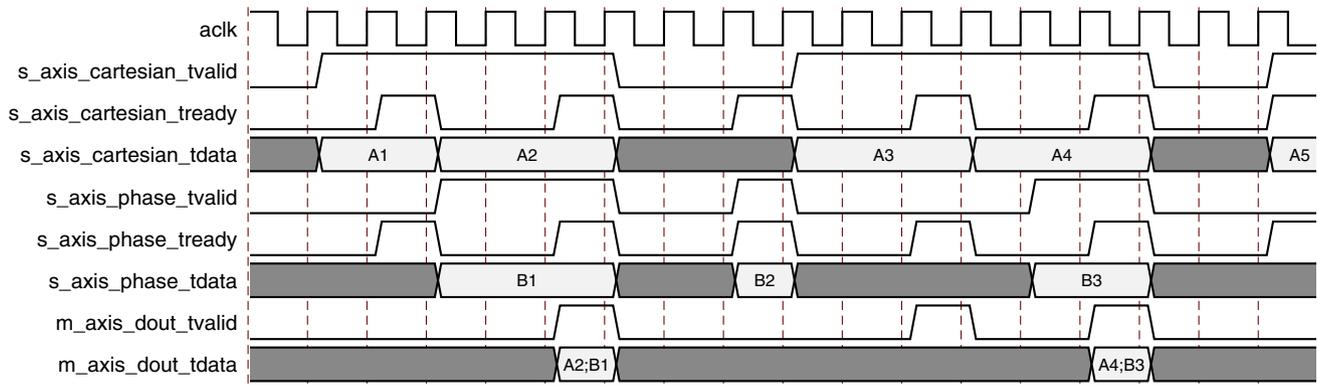


Figure 3: NonBlocking mode

Blocking Mode

The term 'Blocking' means that each channel with TREADY buffers data for use. The full flow control of AXI4-Stream aids system design because the flow of data is self-regulating. Blocking or NonBlocking behavior is selected using the flow_control XCO parameter or GUI field. Data loss is prevented by the presence of back pressure (TREADY), so that data is only propagated when the downstream datapath is ready to process the data. The CORDIC core has one or two input channels and one output channel. When all input channels have validated data available, an operation occurs and the result becomes available on the output. If the output is prevented from off-loading data because m_axis_dout_tready is low, data accumulates in the output buffer internal to the core. When this output buffer is nearly full the core stops further operations. This prevents the input buffers from off-loading data for new operations so the input buffers fill as new data is input. When the input buffers fill, their respective TREADYs (s_axis_cartesian_tready and s_axis_phase_tready) are de-asserted to prevent further input. This is the normal action of back pressure. The two input channels are tied, as each must receive validated data before an operation can proceed. As an additional blocking mechanism, one input channel does not receive validated data while the other does. In this case, the validated data is stored in the input buffer of the channel. After a few cycles of this scenario, the buffer of the channel receiving data fills and TREADY for that channel is de-asserted until the empty channel receives some data.

Figure 4 shows both blocking behavior and back pressure. The first data on channel S_AXIS_CARTESIAN is paired with the first data on channel S_AXIS_PHASE, the second with the second, and so on. This demonstrates the 'blocking' concept. The channel names S_AXIS_CARTESIAN and S_AXIS_PHASE are used conceptually. Either can be taken to mean the cartesian or phase channel. Figure 4 further shows how data output is delayed not only by latency, but also by the handshake signal m_axis_dout_tready. This is 'back pressure'. Sustained back pressure on the output along with data availability on the inputs eventually leads to a saturation of the core buffers, causing the core to signal that it can no longer accept further input by de-asserting the input channel TREADY signals. The minimum latency in this example is two cycles, but it should be noted that in Blocking operation latency is not a useful concept. Instead, as Figure 4 shows, each channel acts as a queue, ensuring that the first, second, third data samples on each channel are paired with the corresponding samples on the other channels for each operation.

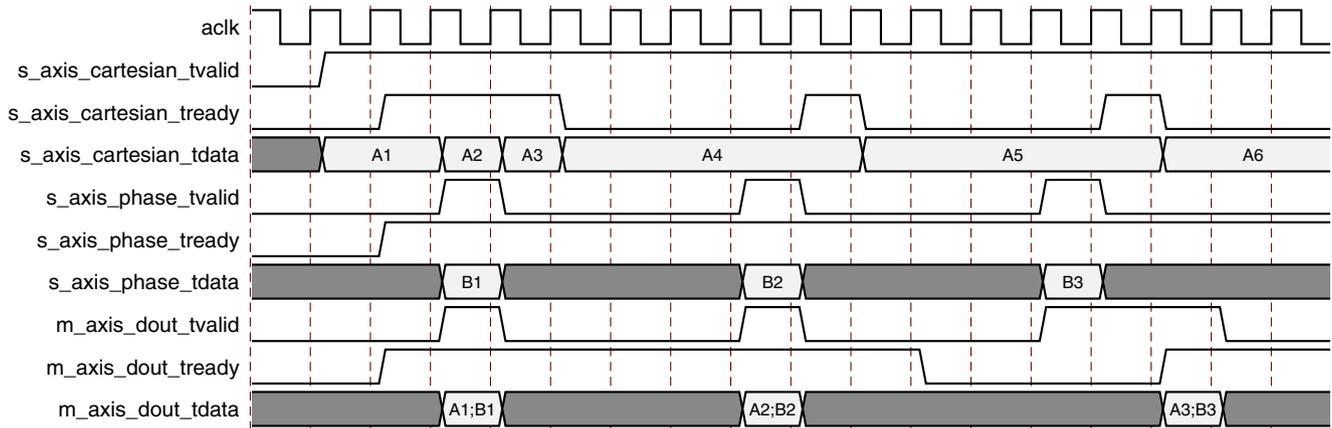


Figure 4: Blocking Mode

TDATA Packing

Fields within an AXI4-Stream interface follow a specific nomenclature. In this core the operands are both passed to or from the core over the TDATA port of the channel. To ease interoperability with byte-oriented protocols, each subfield within TDATA that could be used independently is first extended, if necessary, to fit a bit field which is a multiple of 8 bits. For the output DOUT channel, result fields are sign-extended to the byte boundary. The bits added by byte orientation are ignored by the core and do not use additional resources.

TDATA Structure for Cartesian Channel

Input channels Dividend and Divisor carry their operands only in their TDATA field. For each, the operand occupies the least significant bits. The TDATA port width itself is the minimum multiple of bytes wide required to contain the operand (Figure 5).

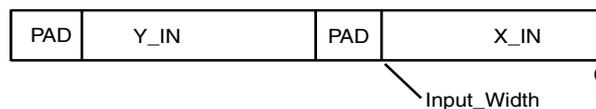


Figure 5: TDATA Structure for Cartesian Channel

TDATA Structure for Phase Channel

Input channels Dividend and Divisor carry their operands only in their TDATA field. For each, the operand occupies the least significant bits. The TDATA port width itself is the minimum multiple of bytes wide required to contain the operand. See Figure 6.

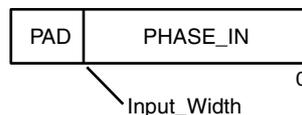


Figure 6: TDATA Structure for Phase Channel

TDATA Structure for Output (DOUT) Channel

The structure of m_axis_dout_tdata is more complex. This port may contain several combinations of output subfields X_OUT, Y_OUT and PHASE_OUT, depending on the Functional Selection parameter. The possible formats are shown with the corresponding functional selections in Figure 7.

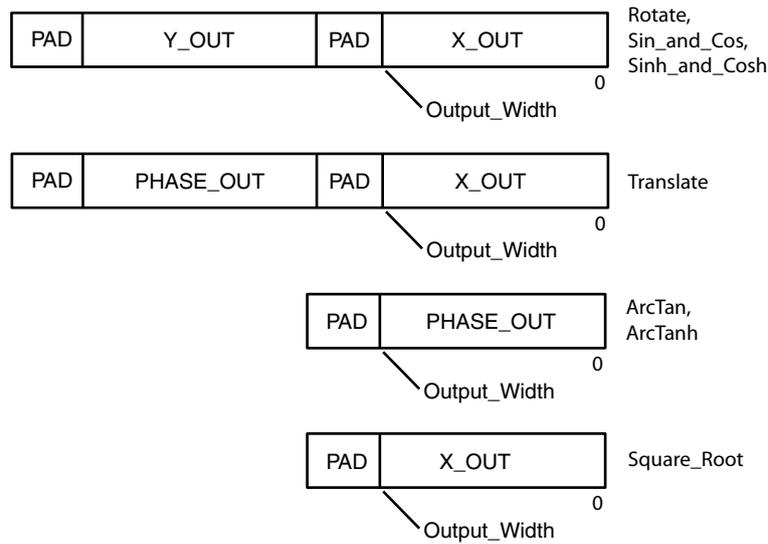


Figure 7: TDATA Structure for Output (DOUT) Channel

TLAST and TUSER Handling

TLAST in AXI4-Stream is used to denote the last transfer of a block of data. TUSER is for ancillary information which qualifies or augments the primary data in TDATA. The CORDIC core operates on a per-sample basis where each operation is independent. Because of this, there is no need for TLAST on a divider. The TLAST and TUSER signals are supported on each input channel as an optional aid to system design for implementations in which the data stream being passed through the CORDIC core has some packetization or ancillary field, but is not relevant to the CORDIC. The facility to pass TLAST and/or TUSER removes the burden of matching latency to the TDATA path (which can be variable) through the CORDIC core.

TLAST Options

TLAST for each input channel is optional. When present, each can be passed through the CORDIC. When more than one channel has TLAST enabled, the core can pass a logical AND or logical OR of the TLASTs input. When no TLASTs are present on any input channel, the output channel does not have TLAST either.

TUSER Options

TUSER for each input channel is optional. Each has user-selectable width. These fields are concatenated, without any byte-orientation or padding, to form the output channel TUSER field. The TUSER field from the cartesian channel occupies the least significant position, followed by the TUSER field from the phase channel.

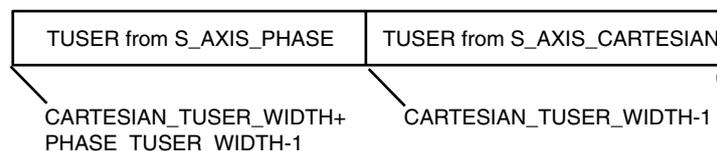


Figure 8: TUSER for Cartesian and Phase Channel

Migrating to CORDIC v5.0 from CORDIC v4.0

The CORE Generator core update functionality can be used to update an existing XCO file from v4.0 to CORDIC v5.0, but the update mechanism alone does not create a core compatible with v4.0. See [Instructions for Minimum Change Migration \(v4.0 to v5.0\)](#).

Table 5 shows the changes to XCO parameters from version 4.0 to version 5.0.

Table 5: XCO Parameter Changes from v4.0 to v5.0

Version 4.0	Version 5.0	Notes
Component_Name	Component_Name	Unchanged
Functional_Selection	Functional_Selection	Unchanged
Architectural_Configuration	Architectural_Configuration	Unchanged
Pipelining_Mode	Pipelining_Mode	Unchanged
Data_Format	Data_Format	Unchanged
Phase_Format	Phase_Format	Unchanged
Input_Width	Input_Width	Unchanged
Register_Inputs	Register_Inputs	Unchanged
Output_Width	Output_Width	Unchanged
Register_Inputs	Register_Inputs	Unchanged
Round_Mode	Round_Mode	Unchanged
Iterations	Iterations	Unchanged
Precision	Precision	Unchanged
Coarse_Rotation	Coarse_Rotation	Unchanged
Compensation_Scaling	Compensation_Scaling	Unchanged
CE	ACLKEN	Renamed only.
SCLR	ARESETN	Renamed. Note that the XCO parameter has not changed, but the signal in question is now active low.
ND		Deprecated.
RDY		Deprecated.
X_OUT		Deprecated. If X_OUT is not connected, unused logic is removed automatically.
Y_OUT		Deprecated. If Y_OUT is not connected, unused logic is removed automatically.
Phase_Output		Deprecated. If PHASE_OUT is not connected, unused logic is removed automatically.
	cartesian_has_tuser	New addition in v5.0
	cartesian_tuser_width	New addition in v5.0
	cartesian_has_tlast	New addition in v5.0
	phase_has_tuser	New addition in v5.0
	phase_tuser_width	New addition in v5.0
	phase_has_tlast	New addition in v5.0
	flow_control	New addition in v5.0
	optimize_goal	New addition in v5.0
	out_tready	New addition in v5.0
	out_tlast_behv	New addition in v5.0

Table 6: Port Changes from Version v4.0 to v5.0

Version 4.0	Version 5.0	Notes
CLK	ack	Rename only
CE	acklen	Rename only
SCLR	aresetn	Rename and change of sense (now active low). Note that aresetn should be asserted for a minimum of 2 cycles.
ND		Deprecated. However, this is analogous to the TVALID signals. See Instructions for Minimum Change Migration (v4.0 to v5.0) .
RFD		Deprecated. However, this is analogous to the TREADY signals. See Instructions for Minimum Change Migration (v4.0 to v5.0) .
RDY		Deprecated. However, this is analogous to the m_axis_dout_tvalid. See Instructions for Minimum Change Migration (v4.0 to v5.0) .
X_IN	s_axis_cartesian_tdata subfield	subfield of s_axis_cartesian_tdata See TDATA Packing .
Y_IN	s_axis_cartesian_tdata subfield	subfield of s_axis_cartesian_tdata. See TDATA Packing .
PHASE_IN	s_axis_phase_tdata subfield	s_axis_phase_tdata(N-1:0)
X_OUT	m_axis_dout_tdata subfield	Subfield of m_axis_dout_tdata. See TDATA Packing .
Y_OUT	m_axis_dout_tdata subfield	Subfield of m_axis_dout_tdata. See TDATA Packing .
PHASE_OUT	m_axis_dout_tdata subfield	Subfield of m_axis_dout_tdata. See TDATA Packing .

Latency Changes

With the addition of AXI4-Stream interfaces, the latency of the CORDIC core v5.0 is different compared to v4.0 for AXI Blocking mode. Latency is the same as v4.0 in v5.0 for AXI NonBlocking mode. Importantly, when in Blocking Mode, the latency of the core is variable due to the FIFO nature of the AXI4-Stream protocol, so only the minimum possible latency can be determined. Relative to v4.0, with Blocking and Output TREADY present, minimum latency is 3 cycles greater. With no output TREADY, minimum latency is increased by one cycle only.

Instructions for Minimum Change Migration (v4.0 to v5.0)

Use the following information to configure the CORDIC core v5.0 to most closely mimic the behavior of v4.0.

Parameters

- Set FlowControl to NonBlocking.

All other new parameters default to false and can be ignored.

Ports

- Rename and map signals as detailed in Port Changes.
- Map ND to both s_axis_cartesian_tvalid and s_axis_phase_tvalid, if present for the function in question.
- Map RFD to s_axis_cartesian_tready or s_axis_phase_tready.
- Map RDY to m_axis_dout_tvalid.

Performance and resource use is mostly unchanged compared with CORDIC v4.0 other than small changes due to the use of a different version of ISE tools.

The CORDIC Algorithm

The CORDIC algorithm was initially designed to perform a vector rotation, where the vector (X,Y) is rotated through the angle θ yielding a new vector (X',Y').

Vector Rotation Equation

$$\begin{aligned}
 1a) \quad X' &= (\cos(\theta) \times X - \sin(\theta) \times Y) \\
 1b) \quad Y' &= (\cos(\theta) \times Y + \sin(\theta) \times X) \\
 1c) \quad \theta' &= 0
 \end{aligned}
 \tag{Equation 1}$$

The CORDIC algorithm performs a vector rotation as a sequence of successively smaller rotations, each of angle $\text{atan}(2^{-i})$, known as *micro-rotations*. Equation 2 shows the expression for the i^{th} iteration where i is the iteration index from 0 to n .

Expression for the i^{th} microrotation

$$\begin{aligned}
 2a) \quad x_{i+1} &= x_i - \alpha_i \cdot y_i \cdot 2^{-i} \\
 2b) \quad y_{i+1} &= y_i + \alpha_i \cdot x_i \cdot 2^{-i} \\
 2c) \quad \theta_{i+1} &= \theta_i + \alpha_i \cdot \text{atan}(2^{-i}) \\
 \alpha_i &= (+ \text{ or } -) 1, \text{ where } \alpha_i \text{ is the direction of rotation.}
 \end{aligned}
 \tag{Equation 2}$$

See [Vector Rotation](#) or [Vector Translation](#) for details on selecting α_i . Each micro-rotation stage can be expressed as a simple shift and add/subtract operation. Equation 3 shows the Vector rotation expression for the n^{th} iteration. Vector rotation expressed as a series of 'n' micro-rotations

$$\begin{aligned}
 3a) \quad X' &= \prod_{i=1}^n \cos(\text{atan}(2^{-i})) (X_i - \alpha_i Y_i 2^{-i}) \\
 3b) \quad Y' &= \prod_{i=1}^n \cos(\text{atan}(2^{-i})) (Y_i + \alpha_i X_i 2^{-i}) \\
 3c) \quad \theta' &= \sum_{i=1}^n \theta - (\alpha_i \cdot \text{atan}(2^{-i})) \\
 \alpha_i &= (+ \text{ or } -) 1.
 \end{aligned}
 \tag{Equation 3}$$

The CORDIC algorithm can be used to generate either a vector rotation or a vector translation.

Vector Rotation

Vector rotation rotates the vector (X, Y) through the angle θ to yield a new vector (X',Y'), as illustrated in [Figure 9](#).

Vector rotation is performed by selecting α_i , such that θ' converges towards zero; that is, when $\theta_{i-1} \geq 0$, α_i is set to -1 and when $\theta_{i-1} < 0$, α_i is set +1.

Vector Rotation Equations

$$\begin{aligned}
 4a) \quad X' &= Z_n \times (\cos(\theta) \times X - \sin(\theta) \times Y) \\
 4b) \quad Y' &= Z_n \times (\cos(\theta) \times Y + \sin(\theta) \times X) \\
 4c) \quad \theta' &= 0
 \end{aligned}
 \tag{Equation 4}$$

$$Z_n = \frac{1}{\prod_{i=1}^n \text{acos}(\text{atan}(2^{-i}))}$$

Vector Translation

Vector translation rotates the vector (X_IN, Y_IN) around the circle until the Y component equals zero as illustrated in [Figure 10](#). The outputs from vector translation are the magnitude, X', and phase, θ', of the input vector (X, Y).

Vector translation is performed by selecting α_i such that Y' converges towards zero; that is, when Y_{i-1} ≥ 0, α_i is set to -1 and when Y_{i-1} < 0, α_i is set +1.

Vector Translation Equations

$$\begin{aligned} 5a) \quad X' &= Z_n \times \sqrt{X^2 + Y^2} \\ 5b) \quad Y' &= 0 \\ 5c) \quad \theta' &= \text{atan}\left(\frac{X}{Y}\right) \end{aligned} \qquad \text{Equation 5}$$

$$Z_n = \frac{1}{\prod_{i=1}^n \text{acos}(\text{atan}(2^{-i}))}$$

The CORDIC Scale Factor

The outputs of the CORDIC algorithm, equations 4 and 5, are equivalent to a vector rotation or vector translation scaled by a constant Z_n. The constant Z_n is known as the CORDIC scale factor.

The CORDIC Scale Factor

$$6a) \quad Z_n = \frac{1}{\prod_{i=1}^n \text{acos}(\text{atan}(2^{-i}))} \qquad \text{Equation 6}$$

The Taylor series expansion of acos (atan (2⁻ⁱ)) is (1 + 2⁻²ⁱ)^{-1/2}. Hence, the constant Z_n can be expressed as

$$6b) \quad Z_n = \prod_{i=1}^n (1 + 2^{-2i})^{1/2}$$

The CORDIC scale factor, Z_n, is only dependent on the number of iterations, n. Only functional configurations Rotate, Translate, Rectangular to Polar, and Polar to Rectangular are affected by the CORDIC scale factor. When these functional configurations are selected, the CORDIC core provides the option of multiplying by 1 / Z_n to cancel out the scaling factor. See [Advanced Configuration Parameters](#) for more information.

Output Quantization Error

The Output Quantization Error can be split into two components; the Output Quantization Error due to the Input Quantization (OQEIQ), and the Output Quantization Error due to Internal Precision (OQEIP).

OQEIQ is due to the 1/2 lsb of quantization noise on the X_IN, Y_IN and PHASE_IN inputs. In a vector rotation this input quantization noise results in OQEIQ of 1/2 an lsb on both the X_OUT and Y_OUT outputs. In a vector translation this input quantization noise results in OQEIQ of 1/2 an lsb on the X_OUT output; however, OQEIQ on the phase output is dependent on the ratio (Y_IN/ X_IN). Thus for small X_IN inputs the effect of input quantization noise on OQEIQ is greatly magnified.

OQEIP is due to the limited precision of internal calculations. In the CORDIC core the default internal precision is set such that the accumulated OQEIP is less than 1/2 the OQEIQ. The internal precision can be manually set to (input width + output width + $\log_2(\text{output_width})$). This reduces OQEIP to 1/2 an lsb (the phase is calculated to full precision regardless of the magnitude input vector).

The Output Quantization Error, for a CORDIC core with default internal precision, is dominated by OQEIQ. OQEIQ can only be reduced by increasing the number of significant magnitude bits in the input vector (X_IN, Y_IN). Increasing the internal precision or zero padding X_IN and Y_IN inputs only affects OQEIP and has minimal effect on the total output quantization error.

The effect of input quantization and internal quantization on the CORDIC phase output quantization error is illustrated in the following examples:

Example 1a: The quantization error in phase output for a small input vector, (Xin_small, Yin_small).

Xin_small : "0000000001" => 1/256.

Yin_small : "0000000001" => 1/256.

Vector translation with no input quantization:

Xin_ideal : "0000000001" => 1/256.

Yin_ideal : "0000000001" => 1/256.

Pout_ideal : "0001100100" => 0.79.

Output quantization error due to the input quantization:

Xin_Quant = Xin_small - 1/2 lsb and Yin_Quant = Yin_small + 1/2 lsb.

Xin_Quant : "0000000001" => 1/512.

Yin_Quant : "00000000011" => 3/512.

Pout_Quant : "0010100000" => 1.25.

OQEIQ = abs(abs(Pout_Quant) - abs(Pout_Ideal)).

OQEIQ = "0000111100" => 0.47.

Output quantization error due to the internal precision:

Xin_cordic : "0000000001" => 1/256.

Yin_cordic : "0000000001" => 1/256.

Pout_cordic : "0001111010" => 0.95.

OQEIP = abs(abs(Pout_cordic) - abs(Pout_Ideal)).

OQEIP = "0000010110" => 0.17.

Example 1b: Quantization error in phase output for a large input vector, (Xin_large, Yin_large).

Xin_large : "0100000000" => 256/256.

Yin_large : "0100000000" => 256/256.

Vector translation with no input quantization:

Xin_ideal : "0100000000" => 256/256.

Yin_ideal : "0100000000" => 256/256.

Pout_ideal : "0001100100" => 0.79.

Output quantization error due to the input quantization:

Xin_Quant = Xin_large - 1/2 lsb and Yin_Quant = Yin_small + 1/2 lsb.

Xin_Quant : "0011111111" => 511/512.

Yin_Quant : "0100000001" => 513/512.

Pout_Quant : "0001100101" => 0.79.

OQEIQ = abs(abs(Pout_Quant) - abs(Pout_Ideal)).

OQEIQ = "0000000001" => 0.00.

Output quantization error due to the internal precision:

Xin_cordic : "0100000000" => 256/256.

Yin_cordic : "0100000000" => 256/256.

Pout_cordic : "0001100100" => 0.79.

OQEIP = abs(abs(Pout_cordic) - abs(Pout_Ideal)).

OQEIP = "0000000000" => 0.00

Functional Description

Vector Rotation

Polar to Rectangular Translation

When the vector rotation functional configuration is selected, the input vector (X_IN, Y_IN) is rotated by the input angle, θ , using the CORDIC algorithm. This generates the scaled output vector, $Z_i * (X', Y')$, shown in [Figure 9](#).

The input subfields, X_IN, Y_IN and PHASE_IN, are limited to the ranges given in [Table 7](#) when coarse rotation is set. Inputs outside these ranges produce unpredictable results. See [Input/Output Data Representation](#) for more information about the CORDIC binary data formats.

An optional coarse rotation module is provided to extend the range of the input subfields, X_IN, Y_IN and PHASE_IN, to the full circle. For this functional configuration, the coarse rotation module is selected by default, but can be manually deselected. See [Advanced Configuration Parameters](#) for more information. When this option is not set, inputs must be constrained to lie in the first quadrant, $-\pi/4$ to $+\pi/4$.

An optional compensation scaling module is provided to compensate for the CORDIC scale factor Z_i . For this functional configuration, the compensation scaling module is selected by default, but can be manually deselected. See [Advanced Configuration Parameters](#) for more information.

A Polar to Rectangular Translation can be implemented by setting the functional configuration to vector rotation, the input vector to (Mag, 0), and the rotation angle to θ , shown in [Figure 10](#).

Vector rotation is linear with respect to magnitude; thus the user can scale the input/output range; that is:

if (X, Y) rotated by angle $\theta = (X', Y')$ then
 $K*(X, Y)$ rotated by angle $\theta = K*(X', Y')$.

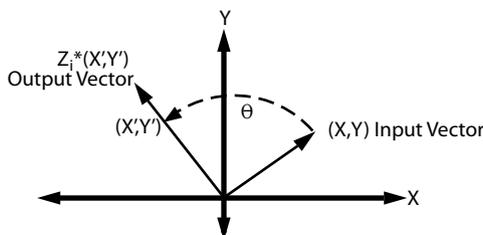


Figure 9: Vector Rotation

Table 7: Vector Rotation I/O

Signal	Range	Description
X_IN	$-1 \leq X_IN \leq 1$	Input X Coordinate
Y_IN	$-1 \leq Y_IN \leq 1$	Input Y Coordinate
PHASE_IN	$-\pi \leq PHASE_IN \leq \pi$	Input Rotation Angle
X_OUT	$-\sqrt{2} \leq X_OUT \leq \sqrt{2}$	Output X Coordinate * Z
Y_OUT	$-\sqrt{2} \leq Y_OUT \leq \sqrt{2}$	Output Y Coordinate * Z

Example 1: Vector Rotation

The input vector, (X_{in}, Y_{in}) , and the output vector, (X_{out}, Y_{out}) are expressed as a pair of fixed-point 2’s complement numbers with an integer width of 2 bits (1QN format). The input rotation angle, P_{in} radians, is also expressed as a fixed-point 2’s complement number but with an integer width of 3 bits (2QN format). See the [Input/Output Data Representation](#) section for further information on the CORDIC binary data formats.

In this example, the input/output width is set to 10 bits and the output vector (X_{out}, Y_{out}) is scaled to compensate for the CORDIC scale factor.

X_{in} : “0010110101” => 00.10110101 => 0.707
 Y_{in} : “0001000000” => 00.01000000 => 0.25
 P_{in} : “1100110111” => 110.0110111 => $-\pi/2$
 X_{out} : “0001000001” => 00.01000001 => 0.25
 Y_{out} : “1101001011” => 11.01001011 => -0.707

Vector Translation

Rectangular to Polar Translation

When the vector translational functional configuration is selected, the input vector (X_{IN}, Y_{IN}) is rotated using the CORDIC algorithm until the Y component is zero. This generates the scaled output magnitude, $Z_i * Mag(X_{IN}, Y_{IN})$, and the output phase, $Atan(Y_{IN}/X_{IN})$, shown in [Figure 10](#).

The inputs, X_{IN} and Y_{IN} , are limited to the ranges given in [Table 8](#) when coarse rotation is set. Inputs outside these ranges produce unpredictable results. See [Input/Output Data Representation](#) for more information about CORDIC binary data formats.

An optional coarse rotation module is provided to extend the range of inputs, X_IN and Y_IN, to the full circle. For this functional configuration, the coarse rotation module is selected by default, but can be manually deselected. See [Advanced Configuration Parameters](#) for more information. When this option is not set, inputs must be constrained to lie in the first quadrant, -Pi/4 to + Pi/4.

An optional compensation scaling module is provided to compensate for the CORDIC scale factor Z_i. For this functional configuration, the compensation scaling module is selected by default, but can be manually deselected. See [Advanced Configuration Parameters](#) for more information.

A rectangular to polar translation can be implemented by setting functional configuration to vector translation, and the input vector to (X,Y), shown in [Figure 10](#).

Vector translation is linear with respect to magnitude, making the input/output range scalable:

if vector (X_IN, Y_IN) is translated to (X',θ'), then
vector K*(X_IN, Y_IN) is translated to K*(X',θ').

The phase angle of a zero length vector, (0,0), is indeterminate and the output phase angle generated by the core is unpredictable.

The accuracy of the phase output from the CORDIC vector translation algorithm is limited by the number of significant magnitude bits of the input vector (X_IN, Y_IN). See [CORE Generator GUI and Parameters](#) for more information.

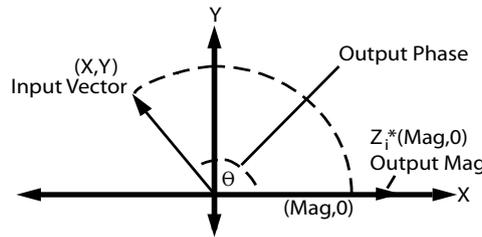


Figure 10: Vector Translation (Polar to Rectangular)

Example 2: Vector Translation

Table 8: Vector Translation I/O

Signal	Range	Description
X_IN	-1 <= X_IN <= 1	Input X Coordinate
Y_IN	-1 <= Y_IN <= 1	Input Y Coordinate
X_OUT	0 <= X_OUT <= Sqrt(2)	Output Magnitude * Z
PHASE_OUT	-Pi <= Phase Out <= Pi	Output Phase

The individual input vector elements, (X_IN, Y_IN), and the output magnitude, X_OUT, are expressed as fixed-point 2's complement numbers with an integer width of 2 bits (1QN format). The output phase angle, PHASE_OUT radians, is expressed as a fixed-point 2's complement number with an integer width of 3 bits (2QN format).

In this example the input/output width is set to 10 bits and the output X_OUT is scaled to compensate for the CORDIC scale factor.

X_IN : "0010110101" => 00.10110101 => 0.707

```

Y_IN : "0001000000" => 00.01000000 => 0.25
X_OUT : "0011000000" => 00.11000000 => 0.75
PHASE_OUT : "0000101011" => 000.0101011 => 0.336

```

Sin and Cos

When the Sin and Cos functional configuration is selected, the unit vector is rotated by input angle, θ , using the CORDIC algorithm. This generates the output vector ($\text{Cos}(\theta)$, $\text{Sin}(\theta)$).

The input PHASE_IN is limited to the range given in [Table 9](#) when coarse rotation is set. Inputs outside this range produce unpredictable results. See [Input/Output Data Representation](#) for more information about CORDIC binary data formats.

An optional coarse rotation module is provided to extend the range of input angle, θ , to the full circle. For this functional configuration, the coarse rotation module is selected by default, but can be manually deselected. See [Advanced Configuration Parameters](#) for more information. When this option is not set, inputs must be constrained to lie in the first quadrant, $-\text{Pi}/4$ to $+\text{Pi}/4$.

The compensation scaling module is disabled for the Sin and Cos functional configuration as it is internally pre-scaled to compensate for the CORDIC scale factor.

Table 9: Sin and Cos

Signal	Range	Description
PHASE_IN	$-\text{Pi} \leq \text{PHASE_IN} \leq \text{Pi}$	Input Angle θ
X_OUT	$-1 \leq \text{X_OUT} \leq 1$	Output $\text{Cos}(\theta)$
Y_OUT	$-1 \leq \text{Y_OUT} \leq 1$	Output $\text{Sin}(\theta)$

Example 3: Sin and Cos

The input angle, PHASE_IN, is expressed as a fixed-point 2's complement number with an integer width of 3 bits (2QN format). The output vector, (X_OUT, Y_OUT), is expressed as a pair of fixed-point 2's complement numbers with an integer width of 2 bits (1QN format).

In this example the input/output width is set to 10 bits.

```

PHASE_IN : "0001100100" => 000.1100100 => 0.781
X_OUT : "0010110110" => 00.10110110 => 0.711
Y_OUT : "0010110100" => 00.10110100 => 0.703

```

Sinh and Cosh

When the Sinh Cosh functional configuration is selected, the CORDIC algorithm is used to move the vector (1,0) through hyperbolic *angle*, p , along the hyperbolic curve shown in Figure 11. The hyperbolic angle represents the log of the area under the vector (X, Y) and is unrelated to a trigonometric angle. This generates the output vector ($X_{OUT} = \text{Cosh}(\text{PHASE_IN})$, $Y_{OUT} = \text{Sinh}(\text{PHASE_IN})$).

The input hyperbolic angle, PHASE_IN, is limited to the range given in Table 10. Inputs outside this range produce unpredictable results. See [Input/Output Data Representation](#) for more information about CORDIC binary data formats.

The coarse rotation module is disabled for the Sinh and Cosh functional configuration, as it does not apply to hyperbolic transformations. The compensation scaling module is disabled for the Sinh and Cosh functional configuration, as it is internally pre-scaled to compensate for the CORDIC hyperbolic scale factor.

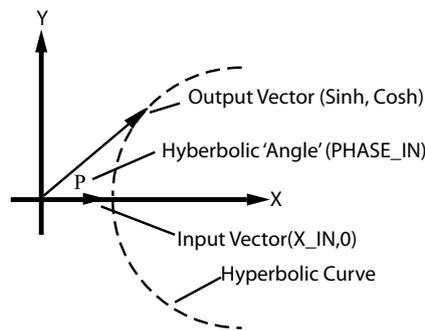


Figure 11: Hyperbolic Sinh Cosh

Table 10: Sinh and Cosh

Signal	Range	Description
PHASE_IN	$-\pi/4 \leq \text{PHASE_IN} \leq \pi/4$	Input Hyperbolic Angle
X_OUT	$1 \leq X_{OUT} < 2$	Output Cosh
Y_OUT	$-2 \leq Y_{OUT} < 2$	Output Sinh

Example 4: Sinh and Cosh

The input hyperbolic angle, P_{in} , is expressed as a fixed-point 2's complement number with an integer width of 3 bits (2QN format). The output vector, (X_{OUT} , Y_{OUT}), is expressed as a pair of fixed-point 2's complement numbers with an integer width of 2 bits (1QN format).

In this example the input/output width is set to 10 bits.

PHASE_IN : "0001001110" => 000.1001110 => 0.781

X_OUT : "0100110001" => 01.00110001 => 1.191

Y_OUT : "0010100110" => 00.10100110 => 0.648

ArcTan

When the ArcTan functional configuration is selected, the input vector (X_{IN}, Y_{IN}) is rotated (using the CORDIC algorithm) until the Y component is zero. This generates the output angle, $Atan(Y_{IN}/X_{IN})$.

The inputs, X_{IN} and Y_{IN} , are limited to the ranges given in [Table 11](#) when coarse rotation is set. Inputs outside these ranges produce unpredictable outputs. See [Input/Output Data Representation](#) for more information about CORDIC binary data formats.

An optional coarse rotation module is provided to extend the range of inputs X_{IN} and Y_{IN} to the full circle. For this functional configuration, the coarse rotation module is selected by default, but can be manually deselected. See [Advanced Configuration Parameters](#) for more information. When this option is not set, inputs must be constrained to lie in the first quadrant, $-Pi/4$ to $+Pi/4$.

The compensation scaling module is disabled for the ArcTan functional configuration as no magnitude data is output. The ArcTan of a zero length vector, (0,0), is indeterminate and the output angle generated by the core is undefined.

The accuracy of the output angle from the CORDIC vector translation algorithm is limited by the number of significant magnitude bits of the input vector (X_{IN}, Y_{IN}). See [Output Quantization Error](#) for more information.

Table 11: ArcTan

Signal	Range	Description
X_{IN}	$-1 \leq X_{IN} \leq 1$	Input X Coordinate
Y_{IN}	$-1 \leq Y_{IN} \leq 1$	Input Y Coordinate
PHASE_OUT	$-Pi \leq PHASE_OUT \leq Pi$	Output Angle

Example 5: ArcTan

The input vector (X_{IN}, Y_{IN}) is expressed as a pair of fixed-point 2's complement numbers with an integer width of 2 bits (1QN format). The output angle, Pout radians, is expressed as a fixed-point 2's complement number with an integer width of 3 bits (2QN format).

In this example, the input/output width is set to 10 bits.

X_{IN} : "0010100000" => 00.10100000 => 0.625

Y_{IN} : "0010000000" => 00.10000000 => 0.500

PHASE_OUT : "0001010110" => 000.1010110 => 0.672

ArcTanh

When the ArcTanh functional configuration is selected, the CORDIC algorithm is used to move the input vector (X_IN, Y_IN) along the hyperbolic curve (Figure 12) until the Y component reaches zero. This generates the hyperbolic “angle,” $\text{Atanh}(Y_IN/X_IN)$. The hyperbolic *angle* represents the log of the area under the vector (X_IN, Y_IN) and is unrelated to a trigonometric angle.

The inputs, X_IN and Y_IN , are limited to the ranges given in Table 12. Inputs outside these ranges produce unpredictable outputs. Additionally, Y_IN must be less than or equal to $(4/5 * X_IN)$ or the CORDIC algorithm does not converge. See [Input/Output Data Representation](#) for more information about CORDIC binary data formats.

The coarse rotation module is disabled for the ArcTanh functional configuration, as it does not apply to hyperbolic transformations.

The compensation scaling module is disabled for the ArcTanh functional configuration as no output magnitude data is output.

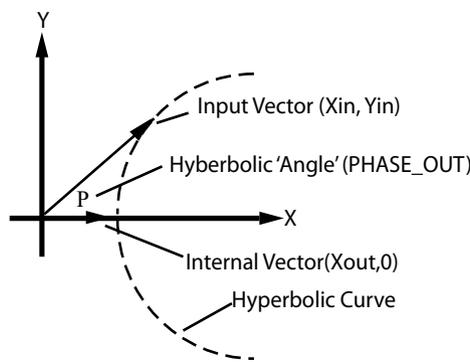


Figure 12: Hyperbolic ArcTan

Table 12: ArcTanh

Signal	Range	Description
X_IN	$0 < X_IN < 2$	Input X Coordinate
Y_IN	$-2 \leq Y_IN < 2$ $-X_IN * 4/5 \leq Y_IN \leq X_IN * 4/5$	Input Y Coordinate
PHASE_OUT	$-\text{Pi}/2 \leq \text{PHASE_OUT} \leq \text{Pi}/2$	Output Hyperbolic Angle

Example 6: ArcTanh

The input vector, (X_IN, Y_IN) , is expressed as a pair of fixed-point 2’s complement numbers with an integer width of 2 bits (1QN format). The output, P_{out} , is expressed as a fixed-point 2’s complement number with an integer width of 3 bits (2QN format).

In this example, the input/output width is set to 10 bits.

X_IN : “0001100101” => 00.01100101 => 0.395

Y_IN : “0001100101” => 00.01100101 => 0.395

$PHASE_OUT$: “0001110001” => 000.1110001=> 0.883

Square Root

When the square root functional configuration is selected, a simplified CORDIC algorithm is used to calculate the positive square root of the input. The input, X_IN, and the output, X_OUT, are always positive and are both expressed as either unsigned fractions or unsigned integers. When the data format is set to Unsigned Fraction, X_IN is limited to the range: $0 \leq X_IN < +2$. When data format is set to Unsigned Integer, X_IN is limited to the range: $0 \leq X_IN < 2^{**}\text{Input Width}$, and the output width is determined automatically based on the input width. See [Input/Output Data Representation](#) for more information about CORDIC binary data formats.

The coarse rotation module is disabled because coarse rotation is not required for the Square Root functional configuration. The compensation scaling module is disabled because no output compensation is required for the Square Root functional configuration.

Table 13: Square Root

Signal	Range	Description
X_IN	Unsigned Fraction: $0 \leq X_IN < +2$ Unsigned Integer: $0 \leq X_IN < 2^{**}\text{Input Width}$	Input X Value
X_OUT	Unsigned Fraction: $0 \leq X_OUT < +2$ Unsigned Integer: $0 \leq X_OUT < 2^{**}[\text{int}(\text{Input Width}/2)+1]$	Output Square Root

Example 7a: Square Root - Unsigned Fraction

The input, X_IN, and output, X_OUT, are expressed as an unsigned fixed-point number with an integer width of 1 bit.

In this example the input/output width is set to 10 bits.

X_IN : "0000100000" => 0.000100000 => 1/16

X_OUT : "0010000000" => 0.010000000 => 1/4

Example 7b: Square Root - Unsigned Integer

The input, X_IN, is expressed as an unsigned integer. The output, X_OUT, is expressed as an unsigned integer. In this example the input width is set to 10 bits so the output width is automatically set to 6 bits.

X_IN : "0000100000" => 32

X_OUT : "000110" => 6

Architectural Configuration

Two architectural configurations are available for the CORDIC core:

- Parallel, with single-cycle data throughput and large silicon area
- Word Serial, with multiple-cycle throughput and a smaller silicon area.

This choice is independent of choices relating to AXI4-Stream behavior.

Parallel Architectural Configuration

The CORDIC algorithm requires approximately one shift-addsub operation for each bit of accuracy. A CORDIC core with a parallel architectural configuration implements these shift-addsub operations in parallel using an array of shift-addsub stages.

A parallel CORDIC core with N bit output width has a latency of N cycles and produces a new output every cycle. The implementation size of this parallel circuit is directly proportional to the internal precision times the number of iterations.

Word Serial Architectural Configuration

The CORDIC algorithm requires approximately one shift-addsub operation for each bit of accuracy. A CORDIC core implemented with the word serial architectural configuration, implements these shift-addsub operations serially, using a single shift-addsub stage and feeding back the output.

A word serial CORDIC core with N bit output width has a latency of N cycles and produces a new output every N cycles. The implementation size this iterative circuit is directly proportional to the internal precision.

Input/Output Data Representation

Cartesian Operands and Results

The S_AXIS_CARTESIAN_TDATA subfields are: X_IN, Y_IN. The M_AXIS_DOUT_TDATA subfields are X_OUT and Y_OUT.

For Functional Configurations, Rotate, Translate, Sin, Cos and Atan, the cartesian operands and results are represented using fixed-point 2's complement numbers with an integer width of 2 bits. The integer width is fixed regardless of the word width; the remainder of the bits are used for the fractional portion of the number. Using the [Q Numbers Format](#) this representation is described as 1QN where N = word width - 2. It can also be described as Fix(N+2)_N using the System Generator Fix format.

Input operands, X_IN and Y_IN, must be in the range: $-1 \leq \text{input data signal} \leq 1$. Input data outside this range produces undefined results.

Using a 10-bit word width, +1 and -1 are represented as:

"0100000000" => 01.00000000 => +1.0

"1100000000" => 11.00000000 => -1.0

For the Square Root Functional Configuration, the Data Signals, X_IN and X_OUT, are both represented in either Unsigned Fractional or Unsigned Integer data format.

The input operand, X_IN, must be in the range: $0 \leq X_IN < +2$ when data format is set to Unsigned Fraction or in the range $0 \leq X_IN < 2^{**}\text{Input Width}$ when data format is set to Unsigned Integer.

When Unsigned Fractional data format has been selected the Data Signals are represented using a unsigned fixed-point number with an integer width of 1 bit. The integer width is fixed and the remainder of the word is used to represent the fractional portion of the number. Using the System Generator Fix format this representation is described as UFix(N+1)_N, where N is the number of fractional bits being used and is defined as N = word width -1. The Q Number format is used to represent signed 2's complement numbers and is therefore not suitable to describe the representation format used by the square root function.

Phase Signals

The S_AXIS_PHASE_TDATA Phase operand is PHASE_IN. The M_AXIS_DOUT_TDATA phase output is called PHASE_OUT. The phase signals are always represented using a fixed-point 2's complement number with an integer width of 3 bits. As with the data signals the integer width is fixed and any remaining bits are used for the fractional portion of the number. The Phase Signals require an increased integer width to accommodate the increased range of values they must represent when the Phase Format is set to Radians.

When Phase Format is set to Radians, PHASE_IN must be in the range: $-\pi \leq (\text{PHASE_IN}) \leq \pi$. PHASE_IN outside this range produce undefined results.

In 2Q7, or Fix10_7, format values, $+\pi$ and $-\pi$ are:

"01100100100" => 011.00100100 => +3.14

"10011011100" => 100.11011100 => -3.14

When Phase Format is set to Scaled Radians PHASE_IN must be in the range: $-1 \leq (\text{PHASE_IN}) \leq +1$. PHASE_IN outside this range produce undefined results.

In 2Q7, or Fix10_7 format values, +1 and -1 are represented as:

"0010000000" => 001.00000000 => +1.0

"1110000000" => 111.00000000 => -1.0

Q Numbers Format

An XQN format number is an 1+X+N bit 2's complement binary number; a sign bit followed by X integer bits followed by an N bit mantissa (fraction). XQN format can be used to express numbers in the range (-2^X) to $(2^X - 2^{-(N)})$. An equivalent notation using the System Generator Fix format, defined as *Fixword_length_fractional_length*, would be Fix(1+X+N)_N.

A number using Q15 format is equivalent to a number using Fix16_15 representation, and a number in 1Q15 format is equivalent to a number using Fix17_15 representation.

Table 14 and Table 15 contain examples of XQN Format Numbers.

Table 14: 1QN Format Data: Example of a 1Q7 (or Fix9_7) Format Number

	(Sign) Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
+1	0	1	0	0	0	0	0	0	0
-1	1	1	0	0	0	0	0	0	0
+Pi/4	0	0	1	1	0	0	1	0	0
-Pi/4	1	1	0	0	1	1	0	1	1
			Fractional Bits						

Table 15: 2QN Format Phase: Example of a 2Q6 (or Fix9_6) Format Number

	(Sign) Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
+1	0	0	1	0	0	0	0	0	0
-1	1	1	1	0	0	0	0	0	0
+Pi	0	1	1	0	0	1	0	0	1
-Pi	1	0	0	1	1	0	1	1	1
				Fractional Bits					

Mapping Different Data Formats

Rotate, Translate, Sin, Cos and Atan Functional Configurations

For Functional Configurations Rotate, Translate, Sin, Cos and Atan it is possible to map alternative Data Signal formats to the fixed integer width fractional number used by the CORDIC core.

When the input and output width differ, care must be taken to re-interpret the CORDIC output.

Example 8a develops Example 2: Vector Translation to demonstrate a possible remapping.

Example 8a

The Vector Translation function determines the magnitude and phase angle of a given input vector (X_IN, Y_IN). The input and output width is set to 10 bits. The standard CORDIC data representation is Fix10_8, the alternative format being mapped onto the input of the CORDIC is Fix10_1.

X_IN value: "0010110101"

Table 16: Example 8: Mapping an Alternative Data Format onto the X_IN input

	Sign Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Decimal Value
Binary Value	0	0	1	0	1	1	0	1	0	1	
Fix10_8 weighting	-2 ¹	2 ⁰	2 ⁻¹	2 ⁻²	2 ⁻³	2 ⁻⁴	2 ⁻⁵	2 ⁻⁶	2 ⁻⁷	2 ⁻⁸	0.707
Fix10_1 weighting	-2 ⁸	2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰	2 ⁻¹	90.5

Y_IN value: "0001000000"

Table 17: Example 8: Mapping an Alternative Data Format onto the Y_IN input

	Sign Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Decimal Value
Binary Value	0	0	1	0	0	0	0	0	0	0	
Fix10_8 weighting	-2 ¹	2 ⁰	2 ⁻¹	2 ⁻²	2 ⁻³	2 ⁻⁴	2 ⁻⁵	2 ⁻⁶	2 ⁻⁷	2 ⁻⁸	0.25
Fix10_1 weighting	-2 ⁸	2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰	2 ⁻¹	32

MATLAB® software is used to generate the expected results. Firstly the magnitude and phase angle for the standard CORDIC input format 1Q8, or Fix10_8 is generated:

```
>> a=0.707+0.25j
>> magnitude = abs(a)
magnitude = 0.7499
>> phase_angle = angle(a)
phase_angle = 0.3399
```

Secondly using the mapped input format, 9Q1 or Fix10_1:

```
>> b=90.5+32j
>> magnitude = abs(b)
magnitude = 95.9909
>> phase_angle = angle(b)
phase_angle = 0.3399
```

The CORDIC output is:

```
X_OUT value: "0011000000"
PHASE_OUT value: "0000101011"
```

Table 18 and Table 19 demonstrate the output value of the CORDIC being interpreted using the two data representation formats.

Table 18: Example 8: X_OUT Interpretation

	Sign Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Decimal Value
Binary Value	0	0	1	1	0	0	0	0	0	0	
Fix10_8 weighting	-2^1	2^0	2^{-1}	2^{-2}	2^{-3}	2^{-4}	2^{-5}	2^{-6}	2^{-7}	2^{-8}	0.75
Fix10_1 weighting	-2^8	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	2^{-1}	96

Table 19: Example 8: PHASE_OUT Interpretation

	Sign Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Decimal Value
Binary Value	0	0	0	0	1	0	1	0	1	1	
Fix10_7 weighting	-2^2	2^1	2^0	2^{-1}	2^{-2}	2^{-3}	2^{-4}	2^{-5}	2^{-6}	2^{-7}	0.336

Example 8b

If the output width is less than the input width, the CORDIC reduces the fractional width of the result. When the data output, X_OUT, is being re-interpreted to an alternative data format, the value must be scaled appropriately.

Table 20 demonstrates how the resulting decimal value might change when the output width is reduced to 8 bits.

Table 20: Example 8b: X_OUT Interpretation with Reduced Output Width

	Sign Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Decimal Value
Binary Value	0	0	1	1	0	0	0	0	
Fix8_6 weighting	-2^1	2^0	2^{-1}	2^{-2}	2^{-3}	2^{-4}	2^{-5}	2^{-6}	0.75
Fix8_0 weighting	-2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	48

A similar situation arises when the output width is greater than the input width. In this case, the CORDIC increases the fractional width of the result. When the data output is being re-interpreted to a data format with no fractional bits, this results in an increased magnitude. This output then needs to be scaled appropriately.

Square Root Functional Configuration

For the Square Root Functional Configuration it is also possible to map other data formats onto the data format of the CORDIC but it might be necessary to re-interpret and scale the output.

Example 9 modifies Example 7a: Square Root - Unsigned Fraction.

Example 9

X_IN value: "00001000"

Table 21: Example 9: Mapping an Alternative Data Format onto the X_IN input

	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Decimal Value
Binary Value	0	0	0	0	1	0	0	0	
UFix8_7 weighting	2^0	2^{-1}	2^{-2}	2^{-3}	2^{-4}	2^{-5}	2^{-6}	2^{-7}	0.0625
UFix8_1 weighting	2^6	2^5	2^4	2^3	2^2	2^1	2^0	2^{-1}	4
UFix8_0 weighting	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	8

The expected output values for each input format are as follows:

UFix8_7 format: $\text{sqrt}(0.0625) = 0.25$

UFix8_1 format: $\text{sqrt}(4) = 2$

UFix8_0 format: $\text{sqrt}(8) = 2.8284$

The CORDIC output is:

X_OUT value: "00100000"

Table 22 demonstrates the output value directly interpreted in each of the input formats.

Table 22: X_OUT Direct Interpretation

	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Decimal Value
Binary Value	0	0	1	0	0	0	0	0	
UFix8_7 weighting	2^0	2^{-1}	2^{-2}	2^{-3}	2^{-4}	2^{-5}	2^{-6}	2^{-7}	0.25
UFix8_1 weighting	2^6	2^5	2^4	2^3	2^2	2^1	2^0	2^{-1}	16
UFix8_0 weighting	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	32

Table 22 shows that if the output value is directly interpreted in the alternative data format the wrong decimal value is determined. The output value must be scaled correctly.

The output scaling is determined as follows.

The CORDIC core calculates the square root of input values in the range $0 \leq X_{IN} < 2$.

$$Y = \sqrt{X} \tag{Equation 7}$$

The alternative data format represents values in the range $0 \leq X_{IN} < 2^{N+1}$ and we wish to calculate:

$$Y_{alt} = \sqrt{X_{alt}} \tag{Equation 8}$$

Interpreting X_{alt} using the standard CORDIC data format scales the input by 2^{-N} , shown in Table 21.

$$Y = \sqrt{2^{-N} \cdot X_{alt}} \tag{Equation 9}$$

$$Y = 2^{(-N)/2} \cdot \sqrt{X_{alt}}$$

As Table 22 shows, directly re-interpreting the CORDIC output in the alternative data formats results in an incorrect decimal value. This is due to the scale factor introduced by the remapping of the input and the square root function. This scaling factor introduced is shown in Equation 9, $2^{-N/2}$.

The corrected results are shown:

UFix8_1 weighting: $16/2^{(6/2)} = 2$

UFix8_0 weighting: $32/2^{(7/2)} = 2.8284$

When N is even the scaling factor is an integer power of two. This can be applied by right shifting the CORDIC output, X_OUT, by N/2. The example using the UFix8_1 format demonstrates this with a scaling factor of $2^{-3} = 1/8$.

When N is odd the scaling factor is not an integer power of two. This introduces an additional output scaling factor of $\sqrt{2}$. The example using UFix8_0 demonstrates this with a scaling factor of $2^{-7/2} = 2^{-3.5}$.

This could be implemented by first scaling the output by a right shift of 4 and then multiplying by $\sqrt{2}$. A more efficient way would be to translate the $\sqrt{2}$ scaling to the input of the square root function.

This is demonstrated in Equation 10 where $2^{-N/2}=2^{-M-(1/2)}$.

$$Y = 2^{(-M-1/2)} \cdot \sqrt{X_{alt}} \tag{Equation 10}$$

$$Y = 2^{-M} \cdot \sqrt{2^{-1} \cdot X_{alt}}$$

The scaling becomes a simple divide by 2, or right shift, of the input, X_IN, before applying it to the square root function. Followed by scaling the output, X_OUT, by 2^{-M} .

An input value of 8 is used for the UFix8_0 formatting example. Divided by 2 this gives 4. Table 21 shows that 4 maps to 1/32 in the CORDIC input range.

$$\sqrt{1/32} = 0.17678 = 0.0010110$$

Table 22 shows that the CORDIC output value, 0.0010110, maps to a decimal value of 22 in UFix8_0 formatting. Applying the output scaling of 2^{-3} , or 1/8, gives 2.75. The loss in accuracy is due to representing $\sqrt{1/32}$ using only 8 bits. If the full accuracy result is used and then re-interpreted to the alternative data format (Fix8_0) and then scaled, the correct result is obtained; for example:

$$\sqrt{1/32} \times 2^7 \times 2^{-3} = 2.8284$$

Performance and Resource Utilization

Tables 24 to 35 show performance and resource usage information for a number of different core configurations. The maximum clock frequency results were obtained by double-registering input and output ports to reduce dependence on I/O placement. The inner level of registers used a separate clock signal to measure the path from the input registers to the first output register through the core.

The resource usage results do not include the "characterization" registers above and represent the true logic used by the core. LUT counts include SRL16s or SRL32s (according to device family).

The map and par options used were:

- map -ol high
- par -ol high

Table 23 shows the parts and speedfiles that were used to generate the results in Tables 24 to 35.

Table 23: Characterization Data Parameters

Family	Device	Speedfile
Spartan-6	XC6SLX75T-4FGG676	PRODUCTION 1.19 2011-08-01
Virtex-6	XC6VCX75T-1FF784	PRODUCTION 1.10 2011-08-01
Virtex-7	XC7VX330T-1FFG1157	ADVANCED 1.01a 2011-08-01
Kintex-7	XC7K325T-1FBG900	ADVANCED 1.01 2011-08-01

Tables 24 to 26 contains characterization data for Spartan-6. The results have been generated with automatically determined Iterations and Precision, Coarse Rotation, no Compensation Scaling and Maximum Pipelining.

Table 24: Performance characteristics on Spartan-6 (Case 1 to 11)

Parameter/Result	Case 1	Case 2	Case 3	Case 4	Case 5	Case 6	Case 7	Case 8	Case 9	Case 10	Case 11
Function	Rotate	Trans	SinCos	Atanh	Square Root	Rotate	Trans	SinCos	Atanh	Rotate	Trans
Architecture	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial				
Input/Output Width	16	16	16	16	16	16	16	16	16	32	32
Round Mode	Trunc	Trunc	Trunc	Trunc	Trunc	Trans	Trans	Trans	Trans	Nearest Even	Nearest Even
LUT6-FF pairs	586	503	18	342	415	1196	1059	1050	1166	1245	928
LUTs	511	463	17	300	389	1116	986	1010	1128	1079	803
FFs	427	335	17	234	318	1104	992	976	1083	851	631
Block Rams	0	0	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0	0	0
Max Clock Frequency	205	195	225	169	334	334	298	334	298	164	164

Table 25: Performance characteristics on Spartan-6 (Case 12 to 22)

Parameter/Result	Case 12	Case 13	Case 14	Case 15	Case 16	Case 17	Case 18	Case 19	Case 20	Case 21	Case 22
Function	SinCos	Atanh	Square Root	Rotate	Trans	SinCos	Atahn	Rotate	Trans	SinCos	Atanh
Architecture	Word Serial	Word Serial	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial	Word Serial	Word Serial
Input/Output Width	32	32	32	32	32	32	32	48	48	48	48
Round Mode	Nearest Even	Trunc	Trunc	Trunc							
LUT6-FF pairs	928	685	1597	4050	3821	3706	3946	1825	1352	1412	1015
LUTs	856	605	1547	3893	3646	3664	3882	1596	1154	1296	892
FFs	597	419	1293	3869	3672	3588	3786	1210	861	857	616
Block Rams	0	0	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0	0	0
Max Clock Frequency	175	148	267	257	210	251	246	143	133	133	127

Table 26: Performance characteristics on Spartan-6 (Case 23 to 31)

Parameter/ Result	Case 23	Case 24	Case 25	Case 26	Case 27	Case 28	Case 29	Case 30	Case 31
Function	Square Root	Rotate	Trans	SinCos	Atanh	Rotate	Rotate	Rotate	Rotate
Architecture	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial	Word Serial	Word Serial
Input/Output Width	48	48	48	48	48	32	32	32	32
Round Mode	Trunc	Trunc	Trunc	Trunc	Trunc	Nearest Even	Nearest Even	Nearest Even	Nearest Even
Flow Control	NonBlock	NonBlock	NonBlock	NonBlock	NonBlock	Block	Block	Block	NonBlock
TUSER	off/off	off/off	off/off	off/off	off/off	off/off	off/off	off/off	8/8
TLAST	off/off	off/off	off/off	off/off	off/off	off/off	off/off	off/off	on/on
OutputTREADY	n/a	n/a	n/a	n/a	n/a	false	true	true	n/a
Optimise Goal	n/a	n/a	n/a	n/a	n/a	n/a	area	speed	n/a
LUT6-FF pairs	2991	8485	8075	7949	8167	1189	1284	1355	1284
LUTs	2934	8148	7820	7826	8068	1035	1127	1231	1116
FFs	2511	8221	7882	7783	7962	750	931	924	908
Block Rams	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0
Max Clock Frequency	236	216	175	169	169	169	169	164	154

Tables 27 to 29 contain characterization data for Virtex®-6. The results have been generated using the same default parameters as for Spartan-6.

Table 27: Performance characteristics on Virtex-6 (Case 1 to 11)

Parameter/Result	Case 1	Case 2	Case 3	Case 4	Case 5	Case 6	Case 7	Case 8	Case 9	Case 10	Case 11
Function	Rotate	Trans	SinCos	Atanh	Square Root	Rotate	Trans	SinCos	Atanh	Rotate	Trans
Architecture	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial				
Input/Output Width	16	16	16	16	16	16	16	16	16	32	32
Round Mode	Trunc	Trunc	Trunc	Trunc	Trunc	Trans	Trans	Trans	Trans	Nearest Even	Nearest Even
LUT6-FF pairs	564	412	434	350	379	1175	1041	1063	1175	1173	914
LUTs	500	374	388	307	334	1104	988	1002	1121	1068	791
FFs	420	304	287	224	318	1119	996	992	1089	840	612
Block Rams	0	0	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0	0	0
Max Clock Frequency	239	239	246	216	377	346	315	307	277	184	193

Table 28: Performance characteristics on Virtex-6 (Case 12 to 22)

Parameter/Result	Case 12	Case 13	Case 14	Case 15	Case 16	Case 17	Case 18	Case 19	Case 20	Case 21	Case 22
Function	SinCos	Atanh	Square Root	Rotate	Trans	SinCos	Atahn	Rotate	Trans	SinCos	Atanh
Architecture	Word Serial	Word Serial	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial	Word Serial	Word Serial
Input/Output Width	32	32	32	32	32	32	32	48	48	48	48
Round Mode	Nearest Even	Trunc	Trunc	Trunc	Trunc						
LUT6-FF pairs	888	690	1437	3982	3746	3750	3946	1797	1316	1377	1011
LUTs	846	629	1304	3890	3674	3658	3894	1630	1139	1246	923
FFs	575	410	1293	3900	3690	3619	3810	1207	834	820	586
Block Rams	0	0	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0	0	0
Max Clock Frequency	193	184	300	224	255	246	239	162	154	162	162

Table 29: Performance characteristics on Virtex-6 (Case 23 to 31)

Parameter/ Result	Case 23	Case 24	Case 25	Case 26	Case 27	Case 28	Case 29	Case 30	Case 31
Function	Square Root	Rotate	Trans	SinCos	Atanh	Rotate	Rotate	Rotate	Rotate
Architecture	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial	Word Serial	Word Serial
Input/Output Width	48	48	48	48	48	32	32	32	32
Round Mode	Trunc	Trunc	Trunc	Trunc	Trunc	Nearest Even	Nearest Even	Nearest Even	Nearest Even
Flow Control	NonBlock	NonBlock	NonBlock	NonBlock	NonBlock	Block	Block	Block	NonBlock
TUSER	off/off	off/off	off/off	off/off	off/off	off/off	off/off	off/off	8/8
TLAST	off/off	off/off	off/off	off/off	off/off	off/off	off/off	off/off	on/on
OutputTREADY	n/a	n/a	n/a	n/a	n/a	false	true	true	n/a
Optimise Goal	n/a	n/a	n/a	n/a	n/a	n/a	area	speed	n/a
LUT6-FF pairs	2549	8411	8020	7967	8241	1120	1282	1313	1278
LUTs	2448	8189	7884	7810	8065	1032	1159	1212	1117
FFs	2511	8271	7915	7830	8008	739	920	913	910
Block Rams	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0
Max Clock Frequency	277	200	154	208	169	193	184	184	193

Tables 30 to 32 contain characterization data for Virtex-7. The results have been generated using the same default parameters as for Spartan-6.

Table 30: Performance characteristics on Virtex-7 (Case 1 to 11)

Parameter/Result	Case 1	Case 2	Case 3	Case 4	Case 5	Case 6	Case 7	Case 8	Case 9	Case 10	Case 11
Function	Rotate	Trans	SinCos	Atanh	Square Root	Rotate	Trans	SinCos	Atanh	Rotate	Trans
Architecture	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial				
Input/Output Width	16	16	16	16	16	16	16	16	16	32	32
Round Mode	Trunc	Trunc	Trunc	Trunc	Trunc	Trans	Trans	Trans	Trans	Nearest Even	Nearest Even
LUT6-FF pairs	590	438	452	349	399	1215	1069	1056	1162	1209	933
LUTs	506	361	395	305	330	1101	989	1002	1122	1104	784
FFs	422	304	287	223	318	1101	971	974	1056	837	611
Block Rams	0	0	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0	0	0
Max Clock Frequency	263	253	283	232	405	416	425	365	395	232	232

Table 31: Performance characteristics on Virtex-7 (Case 12 to 22)

Parameter/Result	Case 12	Case 13	Case 14	Case 15	Case 16	Case 17	Case 18	Case 19	Case 20	Case 21	Case 22
Function	SinCos	Atanh	Square Root	Rotate	Trans	SinCos	Atahn	Rotate	Trans	SinCos	Atanh
Architecture	Word Serial	Word Serial	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial	Word Serial	Word Serial
Input/Output Width	32	32	32	32	32	32	32	48	48	48	48
Round Mode	Nearest Even	Trunc	Trunc	Trunc							
LUT6-FF pairs	907	710	1525	4028	3808	3721	3956	1850	1358	1345	1034
LUTs	844	635	1324	3880	3664	3656	3877	1614	1155	1250	916
FFs	575	409	1293	3866	3633	3586	3745	1207	832	817	584
Block Rams	0	0	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0	0	0
Max Clock Frequency	222	202	355	345	323	345	323	192	202	192	192

Table 32: Performance characteristics on Virtex-7 (Case 23 to 31)

Parameter/ Result	Case 23	Case 24	Case 25	Case 26	Case 27	Case 28	Case 29	Case 30	Case 31
Function	Square Root	Rotate	Trans	SinCos	Atanh	Rotate	Rotate	Rotate	Rotate
Architecture	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial	Word Serial	Word Serial
Input/Output Width	48	48	48	48	48	32	32	32	32
Round Mode	Trunc	Trunc	Trunc	Trunc	Trunc	Nearest Even	Nearest Even	Nearest Even	Nearest Even
Flow Control	NonBlock	NonBlock	NonBlock	NonBlock	NonBlock	Block	Block	Block	NonBlock
TUSER	off/off	off/off	off/off	off/off	off/off	off/off	off/off	off/off	8/8
TLAST	off/off	off/off	off/off	off/off	off/off	off/off	off/off	off/off	on/on
OutputTREADY	n/a	n/a	n/a	n/a	n/a	false	true	true	n/a
Optimise Goal	n/a	n/a	n/a	n/a	n/a	n/a	area	speed	n/a
LUT6-FF pairs	2714	8421	8152	7947	8261	1160	1298	1341	1290
LUTs	2500	8171	7811	7794	8063	1024	1143	1225	1145
FFs	2511	8218	7862	7782	7957	736	917	910	907
Block Rams	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0
Max Clock Frequency	283	303	247	303	263	222	222	222	222

Tables 33 to 35 contain characterization data for Kintex™-7. The results have been generated using the same default parameters as for Spartan-6.

Table 33: Performance characteristics on Kintex-7 (Case 1 to 11)

Parameter/Result	Case 1	Case 2	Case 3	Case 4	Case 5	Case 6	Case 7	Case 8	Case 9	Case 10	Case 11
Function	Rotate	Trans	SinCos	Atanh	Square Root	Rotate	Trans	SinCos	Atanh	Rotate	Trans
Architecture	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial				
Input/Output Width	16	16	16	16	16	16	16	16	16	32	32
Round Mode	Trunc	Trunc	Trunc	Trunc	Trunc	Trans	Trans	Trans	Trans	Nearest Even	Nearest Even
LUT6-FF pairs	580	430	451	346	372	1198	1073	1061	1171	1206	896
LUTs	517	369	396	308	333	1116	986	1004	1114	1100	823
FFs	422	304	287	223	318	1101	971	974	1056	837	611
Block Rams	0	0	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0	0	0
Max Clock Frequency	272	272	288	246	427	394	419	403	403	230	239

Table 34: Performance characteristics on Kintex-7 (Case 12 to 22)

Parameter/Result	Case 12	Case 13	Case 14	Case 15	Case 16	Case 17	Case 18	Case 19	Case 20	Case 21	Case 22
Function	SinCos	Atanh	Square Root	Rotate	Trans	SinCos	Atahn	Rotate	Trans	SinCos	Atanh
Architecture	Word Serial	Word Serial	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial	Word Serial	Word Serial
Input/Output Width	32	32	32	32	32	32	32	48	48	48	48
Round Mode	Nearest Even	Trunc	Trunc	Trunc	Trunc						
LUT6-FF pairs	908	710	1516	4024	3839	3735	3962	1864	1359	1393	1029
LUTs	852	635	1328	3896	3667	3653	3876	1650	1170	1240	921
FFs	575	409	1293	3866	3633	3586	3745	1207	832	817	584
Block Rams	0	0	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0	0	0
Max Clock Frequency	230	214	370	353	345	337	328	197	180	197	206

Table 35: Performance characteristics on Kintex-7 (Case 23 to 31)

Parameter/Result	Case 23	Case 24	Case 25	Case 26	Case 27	Case 28	Case 29	Case 30	Case 31
Function	Square Root	Rotate	Trans	SinCos	Atanh	Rotate	Rotate	Rotate	Rotate
Architecture	Word Serial	Parallel	Parallel	Parallel	Parallel	Word Serial	Word Serial	Word Serial	Word Serial
Input/Output Width	48	48	48	48	48	32	32	32	32
Round Mode	Trunc	Trunc	Trunc	Trunc	Trunc	Nearest Even	Nearest Even	Nearest Even	Nearest Even
Flow Control	NonBlock	NonBlock	NonBlock	NonBlock	NonBlock	Block	Block	Block	NonBlock
TUSER	off/off	off/off	off/off	off/off	off/off	off/off	off/off	off/off	8/8
TLAST	off/off	off/off	off/off	off/off	off/off	off/off	off/off	off/off	on/on
OutputTREADY	n/a	n/a	n/a	n/a	n/a	false	true	true	n/a
Optimise Goal	n/a	n/a	n/a	n/a	n/a	n/a	area	speed	n/a
LUT6-FF pairs	2645	8366	8098	7959	8237	1144	1289	1361	1297
LUTs	2513	8239	7866	7801	8068	1048	1159	1220	1129
FFs	2511	8218	7862	7782	7957	736	917	910	907
Block Rams	0	0	0	0	0	0	0	0	0
XtremeDSP slices	0	0	0	0	0	0	0	0	0
Max Clock Frequency	304	320	280	295	288	230	230	230	230

References

1. Volder, J., "The CORDIC Trigonometric Computing Technique" IRE Trans. Electronic Computing, Vol. EC-8, Sept. 1959, pp330-334.
2. Walther, J.S., "A Unified Algorithm for Elementary Functions," Spring Joint computer conf., 1971, proc., pp379-385.
3. Xilinx AXI Design Reference Guide ([UG761](#))
4. [AMBA 4 AXI4-Stream Protocol Version: 1.0 Specification](#)

Support

Xilinx provides [technical support](#) for this LogiCORE IP product when used as described in the product documentation. Xilinx cannot guarantee timing, functionality, or support of product if implemented in devices that are not defined in the documentation, if customized beyond that allowed in the product documentation, or if changes are made to any section of the design labeled *DO NOT MODIFY*.

See the IP Release Notes Guide ([XTP025](#)) for further information on this core. There is a link to all the DSP IP and then to each core. For each core, there is a master Answer Record that contains the Release Notes and Known Issues list for each core. The following information is listed for each version of the core:

- New Features
- Bug Fixes
- Known Issues

Ordering Information

This LogiCORE IP module is included at no additional cost with the Xilinx ISE Design Suite software and is provided under the terms of the [Xilinx End User License Agreement](#). Use the CORE Generator software included with the ISE Design Suite to generate the core. For more information, see the [core page](#).

Contact your local Xilinx [sales representative](#) for pricing and availability of additional Xilinx LogiCORE modules and software. Information about additional Xilinx LogiCORE modules is available on the Xilinx [IP Center](#).

Revision History

Date	Version	Revision
10/19/11	1.0	Initial Xilinx release for AXI version of core. Previous version of this data sheet is DS249.

Notice of Disclaimer

The information disclosed to you hereunder (the "Materials") is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available "AS IS" and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials or to notify you of updates to the Materials or to product specifications. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.